


## 24 AWG – 7×32 Stranded Tinned Copper – Fluoropolymer

Stranded Tinned Copper  
Twisted Pairs  
Fluorocopolymer Jacket

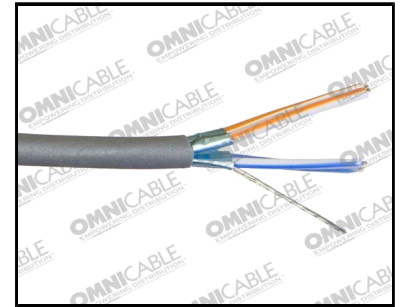

\*Product images are for illustrative purposes only and may differ from the actual product.

### Category Conductor Description:

- Stranded tinned copper with overall foil shield

### Shield Drain:

- Individual aluminum/polyester foil shield with 100% coverage

### Applications:

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise
- Features include low dielectric constant and a dissipation factor for high speed, low distortion data handling
- Physical properties include good crush resistance and light weight

### Category Insulation Description:

- Foam Fluoropolymer

### Category Jacket Description:

- Gray, Fluoropolymer

### Standards:

- CMP/CL2P
- 150°C temperature rating

Color Code Chart	
# of Pairs	Color
1	White/Blue Stripe & Blue/White Stripe
2	White/Orange Stripe & Orange/White Stripe
3	White/Green Stripe & Green/White Stripe
4	White/Brown Stripe & Brown/White Stripe
5	White/Gray Stripe & Gray/White Stripe
6	Red/Blue Stripe & Blue/Red Stripe
7	Red/Orange Stripe & Orange/Red Stripe
8	Red/Green Stripe & Green/Red Stripe

9	Red/Brown Stripe & Brown/Red Stripe
10	Red/Gray Stripe & Gray/Red Stripe
11	Black/Blue Stripe & Blue/Black Stripe
12	Black/Orange Stripe & Orange/Black Stripe
13	Black/Green Stripe & Gr/Black Stripe
14	Black/Brown Stripe & Brown/Black Stripe
15	Black/Gray Stripe & Gray/Black Stripe
16	Yellow/Blue Stripe & Blue/Yellow Stripe
17	Yellow/Orange Stripe & Orange/Yellow Stripe
18	Yellow/Green Stripe & Green/Yellow Stripe
19	Yellow/Brown Stripe & Brown/Yellow Stripe
20	Yellow/Gray Stripe & Gray/Yellow Stripe
21	Purple/Blue Stripe & Blue/Purple Stripe
22	Purple/Orange Stripe & Orange/Purple Stripe
23	Purple/Green Stripe & Green/Purple Stripe
24	Purple/Brown Stripe & Brown/Purple Stripe
25	Purple/Gray Stripe & Gray/Purple Stripe

## Part Number Table

Part#	Gauge	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Nominal Capacitance	Material Weight (Lbs./M')
G62402	24	2	7x32	0.015	0.017	0.189	11.8 pF/ft.	24.3
G62403	24	3	7x32	0.015	0.02	0.261	11.8 pF/ft.	40

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977 <sup>TM</sup> | phone: 800-292-OMNI | website: [omnicable.com](http://omnicable.com)

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •  
St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC