


24 AWG – 7×32 Stranded Tinned Copper – Low-Smoke PVC Jacket

Stranded Tinned Copper
Twisted Pairs
Low-Smoke PVC Jacket

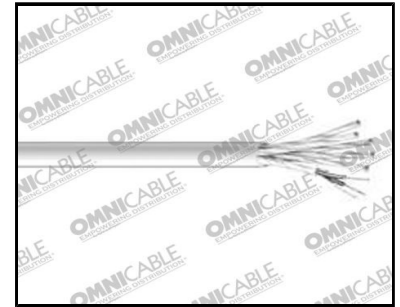

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Stranded tinned copper with overall foil shield

Shield Drain:

- Individual aluminum/polyester foil shield with 100% coverage

Applications:

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise
- Features include low dielectric constant and a dissipation factor for high speed, low distortion data handling
- Physical properties include good crush resistance and light weight

Category Insulation Description:

- Foam Fluoropolymer

Category Jacket Description:

- Orange, low-smoke Polyvinyl Chloride (PVC)

Standards:

- CMP/CL2P
- 75°C temperature rating

| Color Code Chart | |
|------------------|---------------|
| # of Pairs | Color |
| 1 | Black & White |

Part Number Table

| Part# | Gauge | Pairs | Stranding | Insulation Thickness | Jacket Thickness | Outside Diameter Inches | Nominal Capacitance | Material Weight (Lbs./M') |
|--------|-------|-------|-----------|----------------------|------------------|-------------------------|---------------------|---------------------------|
| G62401 | 24 | 1 | 7x32 | 0.015 | 0.014 | 0.134 | 11.8 pF/ft. | 11.3 |

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC