


## 24 AWG = 7x32 Stranded Tinned Copper - Low-Smoke PVC Jacket

Stranded Tinned Copper  
Twisted Pairs  
Low-Smoke PVC Jacket

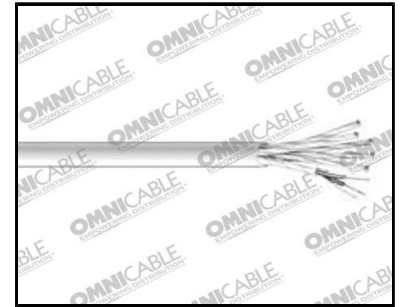

\*Product images are for illustrative purposes only and may differ from the actual product.

### Category Conductor Description:

- Stranded tinned copper with overall foil shield

### Shield Drain:

- Individual aluminum/polyester foil shield with 100% coverage

### Applications:

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise
- Features include low dielectric constant and a dissipation factor for high speed, low distortion data handling
- Physical properties include good crush resistance and light weight

### Category Insulation Description:

- Foam Fluoropolymer

### Category Jacket Description:

- Orange, low-smoke Polyvinyl Chloride (PVC)

### Standards:

- CMP/CL2P
- 75°C temperature rating

Color Code Chart	
# of Pairs	Color
1	Black & White

Part Number Table

Part#	Gauge	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Nominal Capacitance	Material Weight (Lbs./M')
G62401	24	1	7x32	0.015	0.014	0.134	11.8 pF/ft.	11.3

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977 <sup>TM</sup> | phone: 800-292-OMNI | website: [omnicable.com](http://omnicable.com)  
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •  
St. Louis • Tampa • Toronto  
© 2020 Omni Cable LLC