


## ASTER All Aluminum Conductor

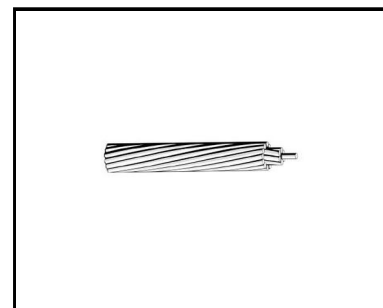

\*Product images are for illustrative purposes only and may differ from the actual product.

### Category Description:

- ALUMINUM ALLOY 1350 WIRES STRANDED HELICALLY AROUND A CENTRAL WIRE CLASS AA FOR BARE CONDUCTORS USED IN OVERHEAD LINES WHERE GREATER FLEXIBILITY REQUIRED CLASS A CONDUCTORS COVERED WITH WEATHER RESISTANT MATERIALS

### Category Applications:

- AAC (ALL ALUMINUM CONDUCTOR) WIRE FOR USE IN OVERHEAD POWER TRANSMISSION AND DISTRIBUTION LINES

### Standards:

- ASTM B-230: ALUMINUM 1350-H19 WIRE FOR ELECTRICAL PURPOSE
- ASTM B-231: CONCENTRIC LAY STRANDED ALUMINUM 1350 CONDUCTORS

### Category Standards:

- ASTM B-230: ALUMINUM 1350-H19 WIRE FOR ELECTRICAL PURPOSE
- ASTM B-231: CONCENTRIC LAY STRANDED ALUMINUM 1350 CONDUCTORS

### Applications:

- AAC (ALL ALUMINUM CONDUCTOR) WIRE FOR USE IN OVERHEAD POWER TRANSMISSION AND DISTRIBUTION LINES

## Part Number Table

Part#	Conductors	Stranding	Nominal OD Overall
PEACHBELL	6	7	0.184
ROSE	4	7	0.232
IRIS	2	7	0.292
PANSY	1	7	0.328
POPPY	1/0	7	0.368
ASTER	2/0	7	0.416
PHLOX	3/0	7	0.464
OXLIP	4/0	7	0.522
SNEEZEWORD	250	7	0.567
VALERIAN	250	19	0.574
DAISY	288.8	7	0.586
LAUREL	266.8	19	0.593
PEONY	300	19	0.628
TULIP	336.4	19	0.666
DAFFODIL	350	19	0.679
CANNA	397.5	19	0.724
GOLDENTUFT	450	19	0.769
COSMOS	477	19	0.792
SYRINGA	477	37	0.795
ZINNIA	500	19	0.811
HYACINTH	500	37	0.813
DAHLIA	556.5	19	0.856
MISTLETOE	566.5	37	0.858
MEADOWSWEET	600	37	0.891
ORCHID	636	37	0.918
HEUCHERA	650	37	0.928
ARBUTUS	795	37	0.1466
MAGNOLIA	954	37	0.1606
NARCISSUS	1272	61	0.1444
COREOPSIS	1590	61	0.1614
COWSLIP	2000	91	0.1482
LUPINE	2500	91	0.1657

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: [omnicable.com](http://omnicable.com)

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •

