


#3/3, #6G, 18/9C TCERJP Generator Installation Tray Cable, 600V Aluminum & Copper Conductors, PVC Insulation and Jacket

10-16 KW Rated Generator

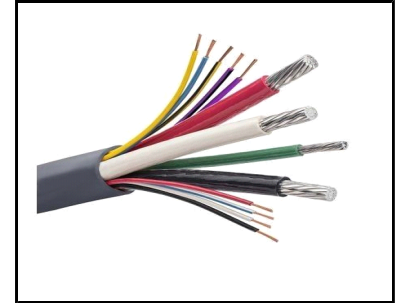

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- 3 AWG Class B stranded 8000 series aluminum 3C, 18 AWG Class K stranded bare copper 6C, 6 AWG Class B stranded 8000 series aluminum ground wire, Sunlight Resistant

Category Jacket Description:

- Moisture resistant, polyvinyl chloride (PVC) insulation

Voltage Search:

- 600V

Applications:

- Suited for use in cable trays, aerial or direct burial installations.
- Type TC-ER Power Control Generator Tray Cable
- JP rated for installation in accordance with Part II of Article 337

Category Insulation Description:

- Polyvinyl Chloride (PVC) insulation

Size Generator:

- 10-16 KW RATED GENERATOR

Conductor Material:

- Aluminum

Standards:

- ASTM B3
- ASTM B8
- ASTM B14
- ICEA S-95-658 (NEMA WC 70)
- ICEA S-73-532 (NEMA WC 57)
- UL 83 Type THWN
- UL 1277
- UL THWN 600V
- UL Type TC-ER-JP 600V

Part Number Table

Part#	Outside Diameter Inches	Ground Gauge	Temperature
TCERJP1016AL9	0.955	3	90°C

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC