

Specification Sheet


Part Number: 109-00001

Open-head design with easily detectable slot opening allows for swift and easy insertion

Pre-lock feature allows for a temporary hold

The large ribbed tail permits an ergonomic installation

Two rails on the strap ensure guidance through the cable tie head

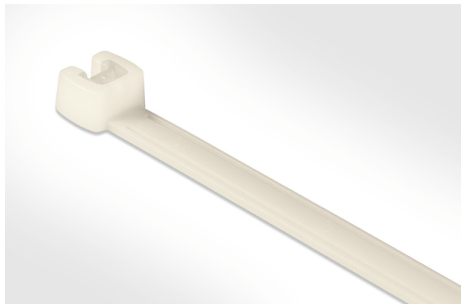

Q Tie, 4.1" Long, 18lb Tensile Strength, PA66, Natural, 100/pkg

Article Number 109-00001

Type Q18R

Color Natural (NA)

Quantity Per bag

Product Description

Q-Ties have a distinctive open-style head, a pre-lock function, and a large ribbed tail. The easily detectable slot opening offered with the tail and tie head provides ease of placement when working with gloves or for blind applications with limited view of the installation. The pre-lock feature allows for temporary holding of cable and wire bundles, permitting additional cables and wires to be placed without destroying the cable tie. Q-Ties can be tensioned by hand or with one of HellermannTyton's mechanical cable tie application tools.

| | |
|-------------------------------------|-----------------------------------------------------------------|
| Short Description | Q Tie, 4.1" Long, 18lb Tensile Strength, PA66, Natural, 100/pkg |
| Global Part Name | Q18R-PA66-NA |
| Minimum Tensile Strength (Imperial) | 18 |
| Minimum Tensile Strength (Metric) | 80 |
| Length L (Imperial) | 4.1 |
| Length L (Metric) | 105 |
| Identification Plate Position | none |
| Releasable Closure | No |
| Tie Closure | plastic pawl |
| Variant | Inside Serrated |
| Width W (Imperial) | 0.1 |
| Width W (Metric) | 2.6 |
| Bundle Diameter Min (Imperial) | 0.06 |
| Bundle Diameter Min (Metric) | 2.0 |
| Bundle Diameter Max (Imperial) | 0.9 |
| Bundle Diameter Max (Metric) | 24.0 |

| | |
|------------------------------|--------------------------------------------------------|
| Thickness T (Imperial) | 0.039 |
| Thickness T (Metric) | 1.0 |
| Material | Polyamide 6.6 (PA66) |
| Material Shortcut | PA66 |
| Flammability | UL 94 V-2 |
| Halogen Free | Yes |
| UV Resistant (Yes/No) | No |
| Operating Temperature | -40°F to +185°F (-40°C to +85°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| Certification/Specification | UL ANSI/UL 746B UL ANSI/UL 1565 UL ANSI/UL 62275 |
| UL Listed (US and Canada) | Yes |
| UL Listed (US) | Yes |
| Package Quantity (Imperial) | 100 |
| Package Quantity (Metric) | 100 |

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 40 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).