


## Specification Sheet

Part Number: 111-85460

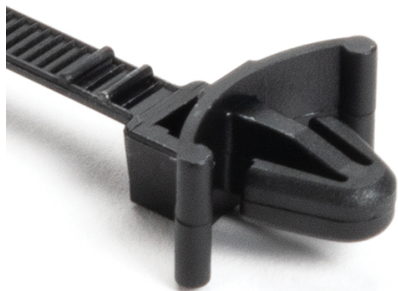

1-Piece Cable Tie/Arrowhead Mount with Wings, 6.5"L, 50lb, 0.25 - 0.30" Mtg Hole, PA66, Black, 500/bag

Article Number	111-85460
Type	T50SL6
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none"><li>•Two piece assembly allows the mount to slide along the strap ensuring proper orientation.</li><li>•Arrowhead style mount provides low insertion and high extraction force.</li><li>•Arrowhead disc protects against dirt and other impurities.</li></ul>
Quantity Per	pcs.

### Product Description

Wing design helps stabilize the tie in high vibration applications. One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.

**Short Description**

1-Piece Cable Tie/Arrowhead Mount with Wings, 6.5"L, 50lb, 0.25 - 0.30" Mtg Hole, PA66, Black, 500/bag

**Global Part Name**

T50SL6-PA66-BK

**Minimum Tensile Strength (Imperial)**

50.0

**Minimum Tensile Strength (Metric)**

225

**Length L (Imperial)**

6.5

**Length L (Metric)**

165

**Fixation Method**

Arrowhead

**Identification Plate Position**

none

**Releasable Closure**

No

**Tie Closure**

plastic pawl

**Variant**

Inside Serrated

**Width W (Imperial)**

0.18

**Width W (Metric)**

4.6

**Bundle Diameter Min (Imperial)**

0.06

**Bundle Diameter Min (Metric)**

1.5

**Bundle Diameter Max (Imperial)**

1.3

<b>Bundle Diameter Max (Metric)</b>	34.0
<b>Thickness T (Metric)</b>	1.2
<b>Panel Thickness Min(Imperial)</b>	0.019
<b>Panel Thickness Max(Imperial)</b>	0.098
<b>Panel Thickness Min (Metric)</b>	0.5
<b>Panel Thickness Max (Metric)</b>	2.5
<b>Mounting Hole Diameter D (Imperial)</b>	0.25 - 0.3
<b>Mounting Hole Diameter D (Metric)</b>	6.3 - 7.5 mm
<b>Mounting Hole Diameter D Max (Metric)</b>	7.5
<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes

<b>Package Quantity(Imperial)</b>	500
<b>Package Quantity (Metric)</b>	500
<b>Customs Number</b>	3926909988
<b>Content Unit(BMEcat)</b>	pcs.
<b>Weight (Metric)</b>	3.2