


Specification Sheet

Part Number: MBT5S-S

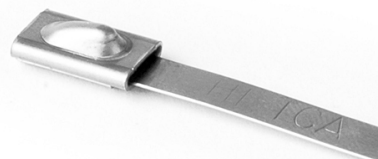

Stainless Steel Tie, 5" Long, 202lb Tensile Strength, SS304, Metal, 100/pkg

Article Number 111-93058

Type MBT5SS

Color Metal (ML)

Features & Benefits

- 304 grade stainless steel offers excellent resistance to corrosion, weather and chemical resistance.
- Self locking, ball bearing mechanism assures high tensile strength and easy insertion.
- Fully enclosed head does not allow dirt or grit to interfere with locking mechanism.
- High tensile strength for dependability and safety on heavy duty applications.

Quantity Per bag

Product Description	HellermannTyton's stainless steel ties are designed with a ball bearing locking mechanism to assure high tensile strength and easy insertion when securing hoses, cables, pipes and more. Available in 304 or 316 grades of stainless steel, providing protection when used in corrosive environments, fire resistance and temperature extremes.
Short Description	Stainless Steel Tie, 5" Long, 202lb Tensile Strength, SS304, Metal, 100/pkg
Global Part Name	MBT5SS-SS304-SR
Minimum Tensile Strength (Imperial)	202.0
Minimum Tensile Strength (Metric)	900.0
Length L (Imperial)	5.0
Length L (Metric)	127.0
Identification Plate Position	none
Releasable Closure	No
Tie Closure	ball bearing lock
Variant	No Serration
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.47

Bundle Diameter Min (Metric)	12.0
Bundle Diameter Max (Imperial)	0.98
Bundle Diameter Max (Metric)	25.0
Thickness T (Imperial)	0.01
Thickness T (Metric)	0.3
Material	Stainless Steel (SS304)
Material Shortcut	SS304
Flammability	Non-Burning
Halogen Free	Yes
Operating Temperature	-112°F to +1000°F (-80°C to +538°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	100
Package Quantity (Metric)	100

Customs Number

7326908695

Weight (Metric)

1.92

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)