


## Specification Sheet

Part Number: 132-00033

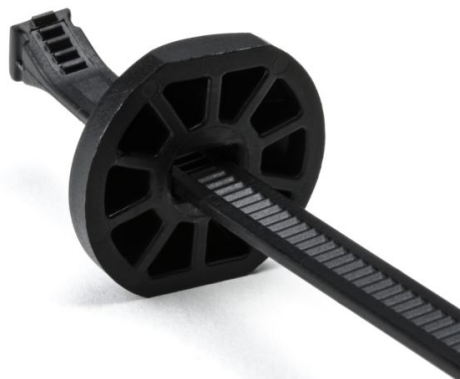

Button Head Cable Tie, 9.6" Long, 2.6" Max Bundle Diameter, 105lb, PA66HSUV, Black, 2000/pkg

Article Number	132-00033
Type	BT105R
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none"><li>• Unique two piece tie allows parallel entry and exit through the head for easy assembly.</li><li>• PA66HIRHS material make it ideal for trucking and heavy equipment applications.</li></ul>
Quantity Per	carton

### Product Description

The button head tie is a two piece tie providing for parallel entry and exit through the head. The strap contains serrations on both sides, and has two opposed pawls recessed within a domed head. This design allows the strap to be directed clockwise or counter-clockwise prior to insertion into the head, enabling bi-directional looping.

<b>Short Description</b>	Button Head Cable Tie, 9.6" Long, 2.6" Max Bundle Diameter, 105lb, PA66HSUV, Black, 2000/pkg
<b>Global Part Name</b>	BT105R-PA66HIRHSUV-BK
<b>Minimum Tensile Strength (Imperial)</b>	105.0
<b>Minimum Tensile Strength (Metric)</b>	467
<b>Length L (Imperial)</b>	9.6
<b>Length L (Metric)</b>	244.4
<b>Fixation Method</b>	Connector Clip
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Tie Closure</b>	plastic pawl
<b>Variant</b>	Outside Serrated
<b>Width W (Imperial)</b>	0.2
<b>Width W (Metric)</b>	5.6
<b>Bundle Diameter Min (Imperial)</b>	0.06
<b>Bundle Diameter Min (Metric)</b>	1.5
<b>Bundle Diameter Max (Imperial)</b>	2.6

**Bundle Diameter Max (Metric)**

66.7

**Material**

Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)

**Material Shortcut**

PA66HIRHSUV

**Material Cable Tie**

Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)

**Material Head**

Polyamide 6.6 heat stabilized (PA66HS)

**Flammability**

UL 94 HB

**Operating Temperature (Metric)**

-40°F to +185°F (-40°C to +85°C)

**Package Quantity(Imperial)**

2000

**Package Quantity (Metric)**

2000