


Specification Sheet

Part Number: 150-10144

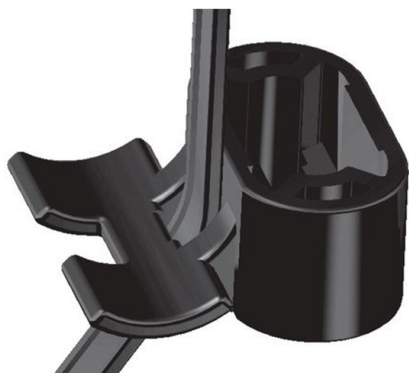

Design gives quick and easy assembly by hand without the need for tools.

Oval design provides for lateral adjustment prior to final installation.

Design provides low insertion force and high extraction force.

2-Piece Cable Tie/Oval Stud Mount, 5.0 mm studs, 6.0" Long, PA66HS, 300/pkg

Article Number 150-10144

Type T50SSB5

Color Black (BK)

Quantity Per pcs.

Product Description The HellermannTyton assemblies consist of a cable tie and a weld stud mounting base - supplied pre-assembled for ease and speed of installation they allow the tie head to be rotated into the perfect position for installation.

Short Description 2-Piece Cable Tie/Oval Stud Mount, 5.0 mm studs, 6.0" Long, PA66HS, 300/pkg

Global Part Name T50SSB5-PA66HS/POM-BK

Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225
Length L (Imperial)	6.0
Length L (Metric)	150.0
Fixation Method	Weld Stud Fixing
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.08
Bundle Diameter Min (Metric)	1.5
Bundle Diameter Max (Imperial)	1.3
Bundle Diameter Max (Metric)	35.0
Thickness T (Metric)	1.2

Height H (Imperial)	0.05
Height H (Metric)	1.2
Stud Length Min (Imperial)	0.56
Stud Length Min (Metric)	14.2
Stud Diameter (Metric)	M5
Stud Diameter (Imperial)	0.197
Material	Polyacetal (POM) Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	POM PA66HS
Material Cable Tie	Polyamide 6.6 heat stabilized (PA66HS)
Flammability	UL 94 HB
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	300

Package Quantity (Metric) 300

Customs Number 3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)