


## Specification Sheet

Part Number: 151-01805

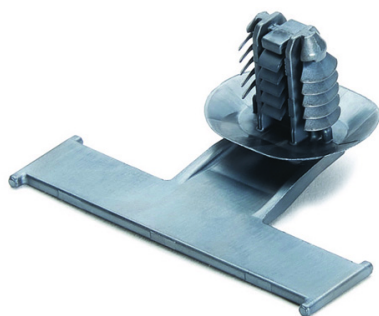

Tape Bar w/Oval Fir Tree, Mounting Hole Dia. 6.2–13.0mm, PPS, Silver 3000/carton

**Article Number** 151-01805

**Type** SOC11FTOVALPPS

**Color** Silver (SR)

**Features & Benefits**

- Staggered fir tree branch design provides low insertion forces and high extraction forces.
- Initial fir tree serves as a locating feature for assistance in blind assembly applications.

**Quantity Per** carton

**Product Description**

Bundling clips are designed to provide simple and easy methods of securing cable bundles, hoses, or pipes. They are fastened onto the tape bar using bundle or cable ties. The different fixing orientations allow tape clips to be used with a wide range of panel thicknesses and hole diameters. Standard bundling clips are available as well as standoff and stud mount versions.

<b>Short Description</b>	Tape Bar w/Oval Fir Tree, Mounting Hole Dia. 6.2–13.0mm, PPS, Silver 3000/carton
<b>Global Part Name</b>	SOC11FTOVALPPS-PPS-ML
<b>Length L (Imperial)</b>	1.97
<b>Length L (Metric)</b>	50.0
<b>Offset Length(Imperial)</b>	0.79
<b>Offset Length(Metric)</b>	20.0
<b>Fixation Method</b>	Fir Tree for oval holes
<b>Height H (Imperial)</b>	0.79
<b>Height H (Metric)</b>	19.9
<b>Panel Thickness Min(Imperial)</b>	0.023
<b>Panel Thickness Max(Imperial)</b>	0.27
<b>Panel Thickness Min (Metric)</b>	0.6
<b>Panel Thickness Max (Metric)</b>	6.75
<b>Mounting Hole Diameter D (Imperial)</b>	0.24 x 0.48 " 0.26 x 0.50 " 0.26 x 0.51 " 0.28 x 0.47
<b>Mounting Hole Diameter D (Metric)</b>	6.5 x 12.5 mm 7.0 x 12.0 mm 6.2 x 12.2 mm 6.5 x 13.0 mm

**Mounting Hole Diameter D Max (Metric)** 13.0

**Material** Polyphenylene Sulfide (PPS)

**Material Shortcut** PPS

**Operating Temperature (Metric)** -40°F to +302°F (-40°C to +150°C)

**Reach Complaint(Article 33)** Yes

**ROHS Complaint** Yes

**Package Quantity(Imperial)** 3000

**Package Quantity (Metric)** 3000

**Customs Number** 3926909988

**Content Unit(BMEcat)** pcs.