


Specification Sheet

Part Number: 157-00175

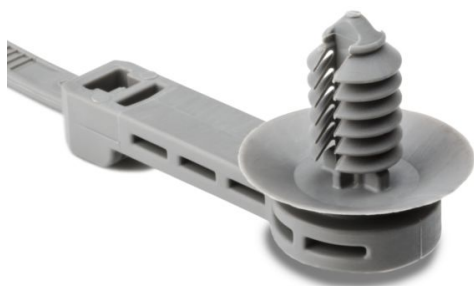

Cable Tie/Fir Tree Mount, 25mm Offset, 9.1"L, 6.1-7.0mm Hole, PA66HIRHSUV, Gray, 500/bag

Article Number	157-00175
Type	T50ROSFT6SO25B
Color	Gray (GY)
Features & Benefits	<ul style="list-style-type: none">• An all-in-one bundling and fixing solution reduces costs.• High-specification materials and superior design suit the fixing and bundling needs of complex applications.
Quantity Per	bag

Product Description	<p>The Offset Cable Ties route and position wire and cable bundles away from a mounting hole. The offset bar between the fir tree and cable tie strap provides a robust and cored-out design to eliminate any potential bending of the wire or cable assembly once installed. The combination of 12.5mm and 25mm offset distances and various fir tree sizes offer coverage for a majority of industry offset routing application. The outside serrations of the tie strap present a smooth surface to the cables preventing any possible damage to soft or delicate bundles. One-piece mounting ties offer a complete solution by both bundling cable and at the same time providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.</p>
Short Description	<p>Cable Tie/Fir Tree Mount, 25mm Offset, 9.1"L, 6.1-7.0mm Hole, PA66HIRHSUV, Gray, 500/bag</p>
Global Part Name	<p>T50ROSFT6SO25B-PA66HIRHSUV-GY</p>
Minimum Tensile Strength (Imperial)	<p>50.0</p>
Minimum Tensile Strength (Metric)	<p>225.0</p>
Length L (Imperial)	<p>9.1</p>
Length L (Metric)	<p>230.0</p>
Offset Length(Imperial)	<p>0.98</p>
Offset Length(Metric)	<p>25.0</p>
Fixation Method	<p>Fir Tree</p>
Identification Plate Position	<p>none</p>

Releasable Closure	No
Width W (Imperial)	0.19
Width W (Metric)	5.1
Bundle Diameter Min (Imperial)	0.08
Bundle Diameter Min (Metric)	2.0
Bundle Diameter Max (Imperial)	1.97
Bundle Diameter Max (Metric)	50.0
Height H (Imperial)	0.90
Panel Thickness Min(Imperial)	0.02
Panel Thickness Max(Imperial)	0.26
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.65
Mounting Hole Diameter D (Imperial)	0.24 - 0.28 ";0.24 - 0.26
Mounting Hole Diameter D (Metric)	6.1 - 6.9 mm
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.28 ";0.26
Mounting Hole Diameter D Max (Metric)	6.9

Disc Diameter(Metric) 19.0

Disc Diameter (Imperial) 0.75

Material Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)

Material Shortcut PA66HIRHSUV

Operating Temperature (Metric) -40°F to +221°F (-40°C to +105°C)

ROHS Complaint Yes

Package Quantity(Imperial) 500

Package Quantity (Metric) 500