


Specification Sheet

Part Number: 157-00333

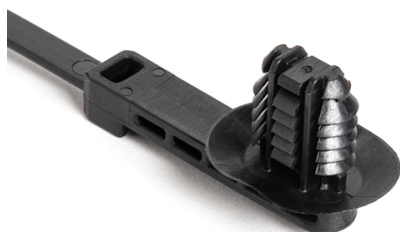

1-Piece Cable Tie/Fir Tree Mount with Disc, 9"L, 6.2 - 13.0 mm, PA66HIRHS, Black, 2000/ctn

Article Number	157-00333
Type	T50ROSFTOVALIL25B
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none">•All-in-one bundling and fastening solution reduces costs and assembly time.•Anti-rotational oval fastener forces bundle to travel in intended direction.•High-spec materials and superior design deliver excellent performance and value.
Quantity Per	carton

Product Description

One-piece cable tie and mount offers a simple bundling and mounting solution. The innovative design of this fir tree establishes a 360-degree interface with the panel hole, ensuring a more secure fit. The oval shape won't rotate once inserted, ensuring proper routing of wires and hoses. The disc feature prevents rattling in high-vibration applications and protects against debris ingress.

Short Description	1-Piece Cable Tie/Fir Tree Mount with Disc, 9"L, 6.2 - 13.0 mm, PA66HIRHS, Black, 2000/ctn
Global Part Name	T50ROSFTOVALIL25B-PA66HIRHS-BK
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225
Length L (Imperial)	9.0
Length L (Metric)	232.3
Offset Length(Imperial)	0.98
Offset Length(Metric)	25.0
Fixation Method	Fir Tree for oval holes
Identification Plate Position	none
Releasable Closure	No
Variant	Outside Serrated
Width W (Imperial)	0.18
Width W (Metric)	4.70
Bundle Diameter Min (Imperial)	0.08
Bundle Diameter Min (Metric)	2.0

Bundle Diameter Max (Imperial)	1.97
Bundle Diameter Max (Metric)	50.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.35
Height H (Imperial)	0.51
Height H (Metric)	12.85
Panel Thickness Min(Imperial)	0.023
Panel Thickness Max(Imperial)	0.27
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.75
Mounting Hole Diameter D (Imperial)	0.24 x 0.48 ";0.25 x 0.50 ";0.25 x 0.51 ";0.27 x 0.47
Mounting Hole Diameter D (Metric)	7.0 x 12.0 mm 6.5 x 12.5 mm 6.2 x 12.2 mm 6.5 x 13.0 mm
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.51
Mounting Hole Diameter D Max (Metric)	13.0
Disc Diameter(Metric)	17.63 x 23.63
Disc Diameter (Imperial)	0.69 x 0.93

Material	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
Material Shortcut	PA66HIRHS
Flammability	UL 94 HB
Operating Temperature (Metric)	-40°F to +230°F (-40°C to +110°C)
ROHS Complaint	Yes
Package Quantity(Imperial)	2000
Package Quantity (Metric)	2000
Customs Number	3926909988