


Specification Sheet

Part Number: 157-00359

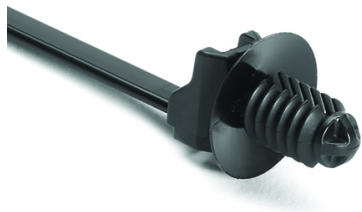

1-Pc Cable Tie/Fir Tree Mount with Disc, 6.5"L, 0.25" - 0.28" Mounting Hole, PA66HS, Black, 500/bag

| | |
|---------------------|--|
| Article Number | 157-00359 |
| Type | T50SOSFT6.5LG-E4X |
| Color | Black (BK) |
| Features & Benefits | <ul style="list-style-type: none">•All-in-one bundling and fastening solution reduces costs and assembly time.•Disc feature provides anti-rattle protection in high-vibration applications. |
| Quantity Per | bag |

Product Description

One-piece mounting ties offer a complete solution by both bundling and mounting wires, cables and tubes. The fir tree mount provides low insertion force with a high extraction force. Outside serrations on the cable tie leave a smooth interior surface that's gentler on sensitive wire insulation. The unique head design allows the cable tie to firmly hold bundles as small as .06" diameter. The disc offers added protection against debris.

Short Description

1-Pc Cable Tie/Fir Tree Mount with Disc, 6.5"L, 0.25" - 0.28" Mounting Hole, PA66HS, Black, 500/bag

Global Part Name

T50SOSFT6.5LG-E4X-PA66HS-BK

Minimum Tensile Strength (Imperial)

50.0

Minimum Tensile Strength (Metric)

227

Length L (Imperial)

6.5

Length L (Metric)

165.0

Fixation Method

Fir Tree

Identification Plate Position

none

Releasable Closure

No

Tie Closure

plastic pawl

Width W (Imperial)

0.18

Width W (Metric)

4.6

Bundle Diameter Min (Imperial)

0.04

Bundle Diameter Min (Metric)

1.0

Bundle Diameter Max (Imperial)

1.38

Bundle Diameter Max (Metric)

35.0

| | |
|--|--|
| Thickness T (Imperial) | 0.05 |
| Thickness T (Metric) | 1.3 |
| Panel Thickness Min(Imperial) | 0.03 |
| Panel Thickness Max(Imperial) | 0.28 |
| Panel Thickness Min (Metric) | 0.7 |
| Panel Thickness Max (Metric) | 7.0 |
| Mounting Hole Diameter D (Imperial) | 0.25 - 0.28 |
| Mounting Hole Diameter D (Metric) | 6.3 - 7.0 mm |
| Mounting Hole Diameter D Min (Imperial) | 0.25 |
| Mounting Hole Diameter D Max (Imperial) | 0.28 |
| Mounting Hole Diameter D Max (Metric) | 7.0 |
| Disc Diameter(Metric) | 16.0 |
| Disc Diameter (Imperial) | 0.63 |
| Material | Polyamide 6.6 heat stabilized (PA66HS) |
| Material Shortcut | PA66HS |
| Flammability | UL 94 HB |

Operating Temperature (Metric)

-40°F to +221°F (-40°C to +105°C)

ROHS Complaint

Yes

Package Quantity(Imperial)

500

Package Quantity (Metric)

500

Customs Number

3926909988