


Specification Sheet

Part Number: 157-00368

One-piece cable tie and fixing offers a simple and easy to use method of bundling and fixing cables, through the design of the fir tree by ensuring positive and secure fixing into panels with thicknesses from 0.6-6.65mm. The offset on the cable tie creates an alternate solution when an offset fixing option is required and a tape clip cannot be used due to the design which reduces the potential of the bundle flexing or shifting.

The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

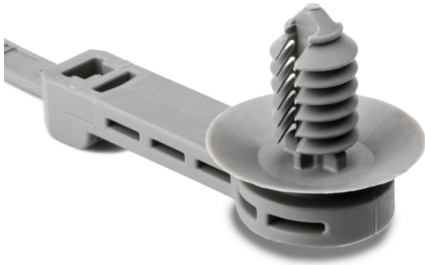

1-Pc Cable Tie/Fir Tree Mount with Disc, 25mm Offset; 9.1"L, 6.1-7mm Hole, PA66HIRHS, Gray, 500/pkg

Article Number	157-00368
Type	T50ROSFT6SO25A
Color	Gray (GY)
Quantity Per	bag

Product Description	HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.
----------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Short Description	1-Pc Cable Tie/Fir Tree Mount with Disc, 25mm Offset; 9.1"L, 6.1-7mm Hole, PA66HIRHS, Gray, 500/pkg
Global Part Name	T50ROSFT6SO25A-PA66HIRHS-GY
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	9.1
Length L (Metric)	230.0
Offset Length (Imperial)	0.98
Offset Length (Metric)	25.0
Fixation Method	Fir Tree
Identification Plate Position	none
Releasable Closure	No
Width W (Imperial)	0.20
Width W (Metric)	5.1
Bundle Diameter Min (Imperial)	0.08
Bundle Diameter Min (Metric)	2.0

Bundle Diameter Max (Imperial)	1.97
Bundle Diameter Max (Metric)	50.0
Height H (Imperial)	0.89
Height H (Metric)	21.2
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.26
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.65
Mounting Hole Diameter D (Imperial)	0.24 - 0.28 ";0.24 - 0.26
Mounting Hole Diameter D (Metric)	6.35 mm (hexagonal) 6.1 - 7.0 mm
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.28 ";0.26
Mounting Hole Diameter D Max (Metric)	7.0
Disc Diameter (Metric)	19.0
Disc Diameter (Imperial)	0.75

Material	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
Material Shortcut	PA66HIRHS
Operating Temperature	-40°F to +230°F (-40°C to +110°C)
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)