


Specification Sheet

Part Number: 553-50071

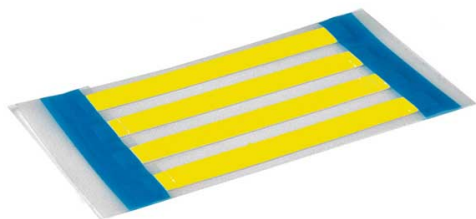

ShrinkTrak Labels, 1-Sided, Unslit, .125" (3.17mm), 2-Slit, PO-X, Yellow, 750/box

Article Number 553-50071

Type HST3-1YE-2S

Color Yellow (YE)

Features & Benefits

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

Quantity Per box

| | |
|--------------------------------------|---|
| Product Description | HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production. |
| Short Description | ShrinkTrak Labels, 1-Sided, Unslit, .125" (3.17mm), 2-Slit, PO-X, Yellow, 750/box |
| Global Part Name | HST3-1YE-2S-PO-X-YE |
| Variant | Thin-Wall |
| Width W (Imperial) | 0.63 |
| Width W (Metric) | 16.0 |
| Thickness T (Imperial) | .003 |
| Thickness T (Metric) | .0762 |
| Height H (Imperial) | 0.235 |
| Height H (Metric) | 5.69 |
| Width of Liner (Metric) | 76.2 |
| Width of Liner (imperial) | 3.0 |
| Outside Diameter OD(Imperial) | 0.125 |
| Outside Diameter OD(metric) | 3.2 |

| | |
|--|--|
| Outside Diameter Max(Imperial) | 0.125 |
| Outside Diameter Max (metric) | 3.2 |
| Wall Thickness WT (Imperial) | 0.031 |
| Wall Thickness WT (Metric) | 0.79 |
| Material | Polyolefin, cross-linked (PO-X) |
| Material Shortcut | PO-X |
| US MIL SPEC | SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K |
| Flammability | UL 224 VW-1 |
| Halogen free | No |
| Operating Temperature (Metric) | -67°F to +275°F (-55°C to +135°C) |
| Reach Complaint(Article 33) | Yes |
| ROHS Complaint | Yes |
| Certification/Specification WEB | CEN SAE - AMS - DTL-23053/5 Class 1 and 3 SAE - AS81531 |
| Package Quantity(Imperial) | 750 |

Package Quantity (Metric) 750

Content Unit(BMEcat) pack

Labels per Column 1

Labels per Row 3

Weight (Metric) 0.294

Weight (Imperial) 0.64