


Specification Sheet

Part Number: 553-50074

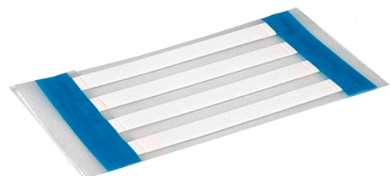

Heat Shrink Labels, Single Side, 1-Slit, .125" (3.17mm), PO-X, White, 2000/box

Article Number	553-50074
Type	HST3-1WH-S
Color	White (WH)
Features & Benefits	<ul style="list-style-type: none">• Slide Slit and optional center slits for easy wire insertion.• Smooth surface for clean and legible printing.• Supplied on a ladder style carrier so that markers can be kitted after printing.• A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.
Quantity Per	box

Product Description

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description	Heat Shrink Labels, Single Side, 1-Slit, .125" (3.17mm), PO-X, White, 2000/box
Global Part Name	HST3-1WH-S-PO-X-WH
Variant	Thin-Wall
Width W (Imperial)	0.95
Width W (Metric)	24.13
Thickness T (Imperial)	.003
Thickness T (Metric)	.0762
Height H (Imperial)	0.235
Height H (Metric)	5.69
Width of Liner (Metric)	76.2
Width of Liner (imperial)	3.0
Outside Diameter OD(Imperial)	0.125
Outside Diameter OD(metric)	3.2
Outside Diameter Max(Imperial)	0.125
Outside Diameter Max (metric)	3.2
Wall Thickness WT (Imperial)	0.031

Wall Thickness WT (Metric)

0.79

Material

Polyolefin, cross-linked (PO-X)

Material Shortcut

PO-X

US MIL SPEC

SAE-AS81531

MIL-STD-202G Method 215K

SAE-AMS-DTL-23053/5 Class 1 and 3

Flammability

UL 224 VW-1

Halogen free

No

Operating Temperature (Metric)

-67°F to +275°F (-55°C to +135°C)

Reach Complaint(Article 33)

Yes

ROHS Complaint

Yes

Certification/Specification WEB

CEN

Package Quantity(Imperial)

2000

Package Quantity (Metric)

2000

Customs Number

3926909987

Content Unit(BMEcat)

pack

Labels per Column

1

Labels per Row

2

Weight (Metric)

1.176

Weight (Imperial)

2.56