


20 AWG – 7x28 Stranded Tinned Copper – S-R PVC

Twisted Pairs - 300 Volt
Individually Shielded
SR-PVC Insulation - 80°C

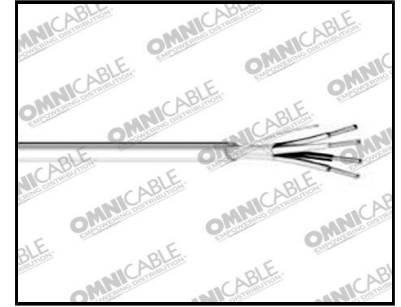

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Stranded tinned copper

Category Insulation Description:

- Semi-Rigid Polyvinyl Chloride (SR-PVC), twisted pairs

Shield:

- Each pair individually shielded with 100% aluminum/polyester shield and 22 AWG stranded tinned copper drain wire

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC)

Applications:

- Audio and control cable

Standards:

- UL AWM 2464
- NEC type CMG
- 300 Volt rated
- 80°C rated

Color Code Chart	
# of Pairs	Color
1	Red & Black
2	Green & White

Part Number Table

Part#	Gauge	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
D32002	20	2	7x28 TC	0.01	0.041	0.301	43

* Capacitance between conductors ** Capacitance between one conductor and other conductors connected to shield

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC