


## #3/3, #8G, #18/9 TCERJP Generator Installation Tray Cable, 600V Copper Conductors, PVC Insulation and Jacket

### TCERJP1724CU9

### NEC 2023 Compliant

Rated 17-24kW for Propane and 17-26kW for Natural Gas

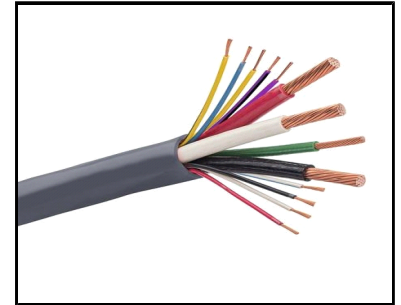

\*Product images are for illustrative purposes only and may differ from the actual product.

#### Category Conductor Description:

- 4 Parts: 3 AWG Class C stranded bare copper 3C, 18 AWG Class K stranded bare copper 9C, 8 AWG Class C stranded bare copper ground wire, Sunlight Resistant

#### Category Insulation Description:

- Polyvinyl Chloride (PVC) insulation

#### Category Jacket Description:

- Moisture resistant, polyvinyl chloride (PVC) insulation

#### Applications:

- Suited for use in cable trays, aerial or direct burial installations.
- Type TC-ER Power Control Generator Tray Cable
- JP rated for installation in accordance with Part II of Article 337

#### Standards:

- ASTM B3
- ASTM B8
- ASTM B174
- ICEA S-95-658 (NEMA WC 70)
- ICEA S-73-532 (NEMA WC 57)
- UL 83 Type THWN
- UL 1277
- UL THWN 600V
- UL Type TC-ER-JP 600V

Part Number Table

Part#	Outside Diameter Inches	Ground Gauge	Temperature
TCERJP1724CU9	0.98	8	75°C

Selling Exclusively Through Distribution Since 1977 <sup>TM</sup> | phone: 800-292-OMNI | website: [omnicable.com](http://omnicable.com)

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •  
St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC